


MODEL: MC7-12L



Parameter

Rated Voltage	12V	
Nominal Capacity(25°C)	7.2Ah(C ₂₀ , 10.5V)	
Dimension	Length	151±2mm(5.94 inch)
	Width	65±2mm(2.56 inch)
	Container Height	94±2mm(3.70 inch)
	Total Height	100±2mm(3.94 inch)
Weight±3%	2.40Kg(5.29 lbs)	
Terminal	F1	
Container Material	ABS	
Rated Capacity(25°C)	7.50Ah	(5HR, 1.50A, 10.5V)
	6.66Ah	(3HR, 2.22A, 10.2V)
	5.06Ah	(1HR, 5.06A, 9.6V)
Full charged Internal Resistance(25°C)	Approx.32mΩ	
Operating Temp.Range	Discharge	-20°C~50°C(-4°F~122°F)
	Charge	-20°C~40°C(-4°F~104°F)
	Storage	-20°C~40°C(-4°F~104°F)
Nominal Operating Temp.Range	25±3°C(77±5°F)	
Max.Charging Current(25°C)	2.16A	
Charge Voltage(25°C)	Cycle	14.5~14.9V
	Temp. Coefficient	-30mV/°C
	Float	13.6~13.8V
	Temp. Coefficient	-18mV/°C
Self Discharge(25°C)	≤3% per month	
Design service life(25°C)	6+ years	

Plane Chart:

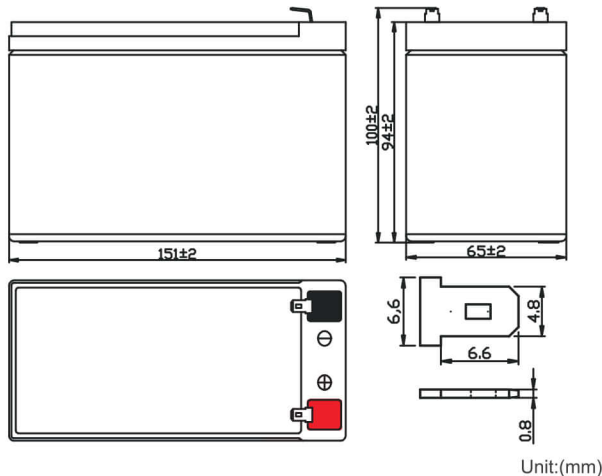

Constant Current Discharge Characteristics (A, 25°C)

F.V./Time	5min	10min	15min	20min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	28.5	18.3	14.2	11.1	8.60	5.06	2.90	2.27	1.82	1.55	1.03	0.838	0.440
10.02V	27.3	17.2	13.6	10.8	8.30	4.97	2.85	2.24	1.79	1.53	1.02	0.830	0.435
10.20V	26.6	16.6	13.3	10.6	8.16	4.93	2.83	2.22	1.78	1.52	1.01	0.827	0.433
10.50V	25.7	16.1	12.7	10.2	7.95	4.81	2.78	2.19	1.76	1.50	1.00	0.822	0.430
10.80V	24.5	15.2	12.1	9.8	7.70	4.66	2.73	2.16	1.74	1.47	0.99	0.815	0.425

Constant Current Discharge Characteristics (Watt, 25°C)

F.V./Time	5min	10min	15min	20min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	305.0	200.4	158.3	123.8	97.8	59.2	34.2	26.9	21.7	18.5	12.3	10.04	5.30
10.02V	293.7	189.2	152.3	121.0	94.6	58.1	33.6	26.5	21.3	18.3	12.2	9.94	5.24
10.20V	287.8	184.3	150.0	119.6	93.4	57.7	33.4	26.3	21.2	18.1	12.1	9.91	5.22
10.50V	280.1	179.5	143.5	115.3	91.4	56.3	32.8	26.0	20.9	17.9	12.0	9.85	5.18
10.80V	270.7	170.2	137.0	110.9	88.9	54.5	32.2	25.6	20.7	17.6	11.8	9.76	5.12

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

MODEL: MC7-12L


Application scope

- Uninterruptable Power Supply(UPS)
- Industrial Process Control Facilities
- Data Network & Operation Centers
- Power supply system for electric tools


- Emergency Power Supply(EPS)
- Hospitals & Testing Laboratories
- Banks & Financial Markets
- Security alarm system




Residual Capacity

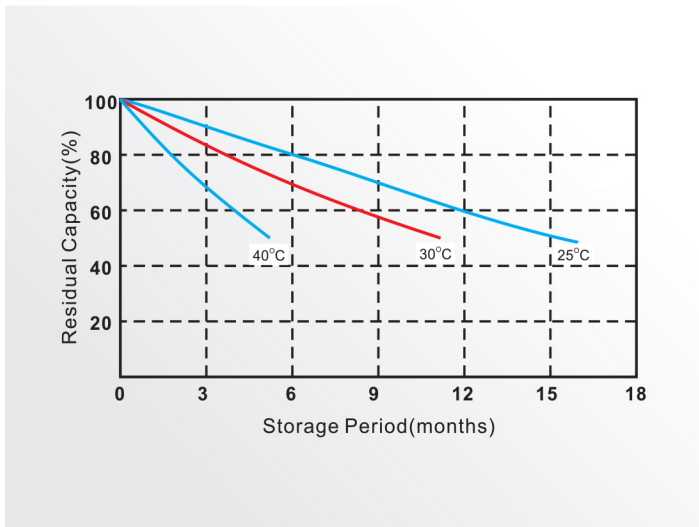


Discharge Current 25°C

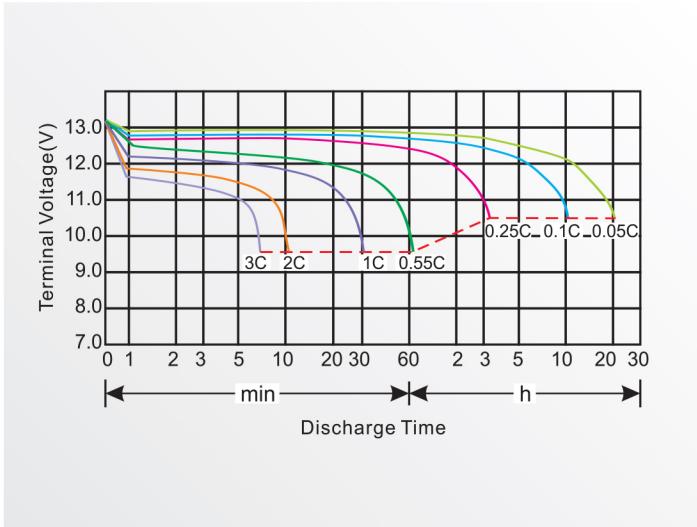

Constant voltage charging characteristics

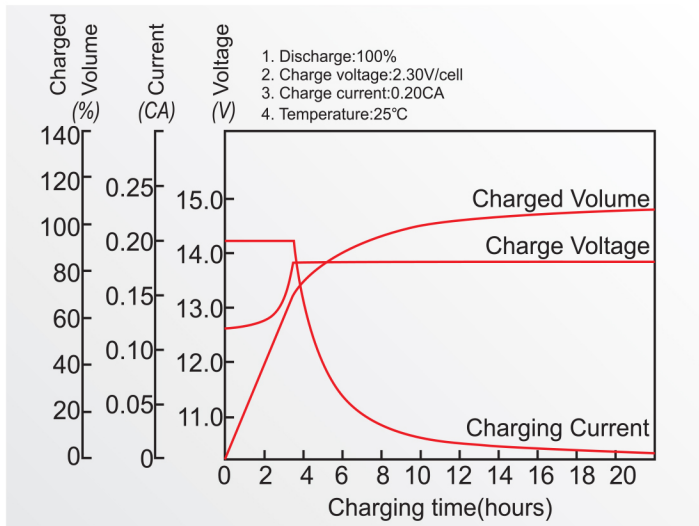

The relationship for OCV and Capacity 25°C

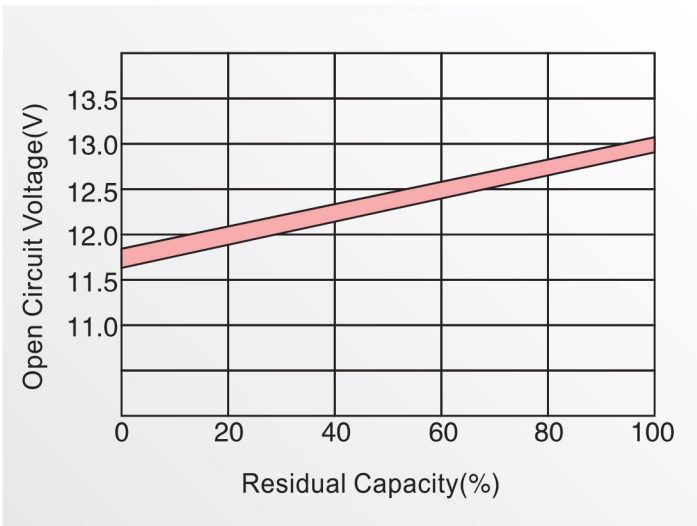

Capacity Factors With Different Temperature

-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.